
AEBN: 220708

Date: July 8, 2022

Subject: 879EX Series DC Powered Horns Wiring Diagram


The DC powered models of the 879EX Series Edwards Signaling hazardous location horns use black, white, and green wires for power input. This includes the following horns:

879EX-C1, 6V DC
879EX-E1, 12V DC
879EX-G1, 24V DC
879EX-J1, 32V DC
879EX-K1, 125V DC
879EX-P1, 250V DC

Wire Colors:

Black - DC input voltage
White - DC input voltage
Green - Earth ground

The polarity on the black and white wires is not marked, the models listed above are not polarity sensitive.

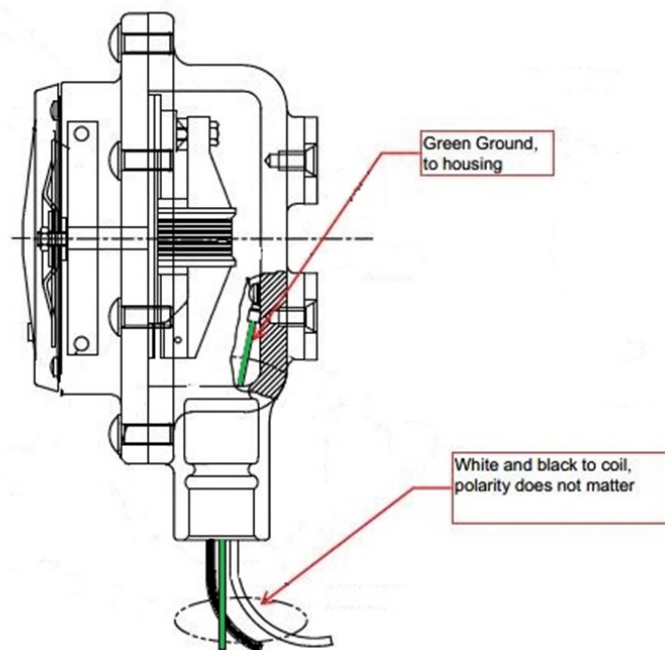

Edwards Signaling, Part of Kidde Corp. – 1016 Corporate Park Drive – Mebane, NC – 27302
Phone: 800-336-4206 – Email: techsupport.signaling@carrier.com